

HT330/350J

SELF-PROPELLED TELESCOPIC BOOMS

Mantall®

Standard Features

- Self-levelling platform
- Hydraulic rotation platform
- Hall effect fully proportional controls
- Driving confirm
- AC wiring to platform
- 360° Turntable rotation
- Horn
- Hour meter
- Tilt alarm
- Positive traction drive
- Dual Speed motor
- Emergency pump
- CAN intelligent control
- Overload sensor

Options Features


- Platform swing gate
- Platform alternate leverage
- Welder connecting packages
- Welder wire connecting to the platform
- Airline to platform
- Hydraulic oil cooler
- Hostile environment packages
- Anti-crash air packages
- Tool tray
- Alarm packages
- Platform work lights
- Traction packages
- AC power source
- Oscillating axle



HT330/350J

MODEL	HT330	HT350J
Max. Working height	33 m	35 m
Max. Platform height	31 m	33 m
Max. Outreach	23 m	23 m
Max. Lift capacity	300 kg	340 kg
Platform size B x C x A	2.44 x 0.91 x 1.1 m	
Height - stowed D	3.05 m	3.11 m
Length - stowed E	14.1 m	15.311 / 13.1 m
Width F	2.49 / 3.95m	
Wheelbase G	4.846 / 4.633m	
Ground clearance H	0.33 m	
Turntable rotation	360°	
Turntable tailswing	1.4 m	
Platform rotation	180°	
Jib Swing	/	130°
Drive speed - stowed	4.2 km/h	
Drive speed - raised	1.1 km/h	
Gradeability	40%	
Min. Turning radius-(inside)	4.08 m	
Min. Turning radius-(outside)	6.89 m	
Drive wheels number	4	
Steering wheel number	4	
Controls	Electro Hydraulic proportional control	
System voltage	DC 12V	
Hydraulic tank capacity	240 L	
Fuel tank capacity	240 L	
Tire size	385/65-24	
Power	Cummins engine QSF2.8T-C72 54kW	
Total weight (4WD)	20500 kg	22100 kg

Range of motion HT330

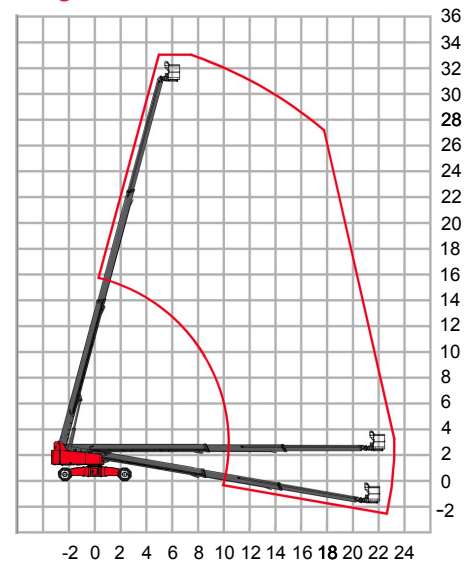

Range of motion HT350J

